

COLD WATER – TWO-WHEEL

The K 1152-Series

One-piece Roto-Mold chassis
Virtually indestructible


Integrated Hose drum
Practical design and features a longer length high-pressure hose complete with folding crank (K 1152 TST)

Cleaning Agent Intake
Injector system for dispensing of cleaning agents


Pressure regulation
Fully adjustable control allows operating pressures to be set to suit any task

Total-stop system
Auto-shutdown feature improves seal life-span and reduces power consumption

Neat storage system
Practical stowing of the trigger gun with safety catch and lances

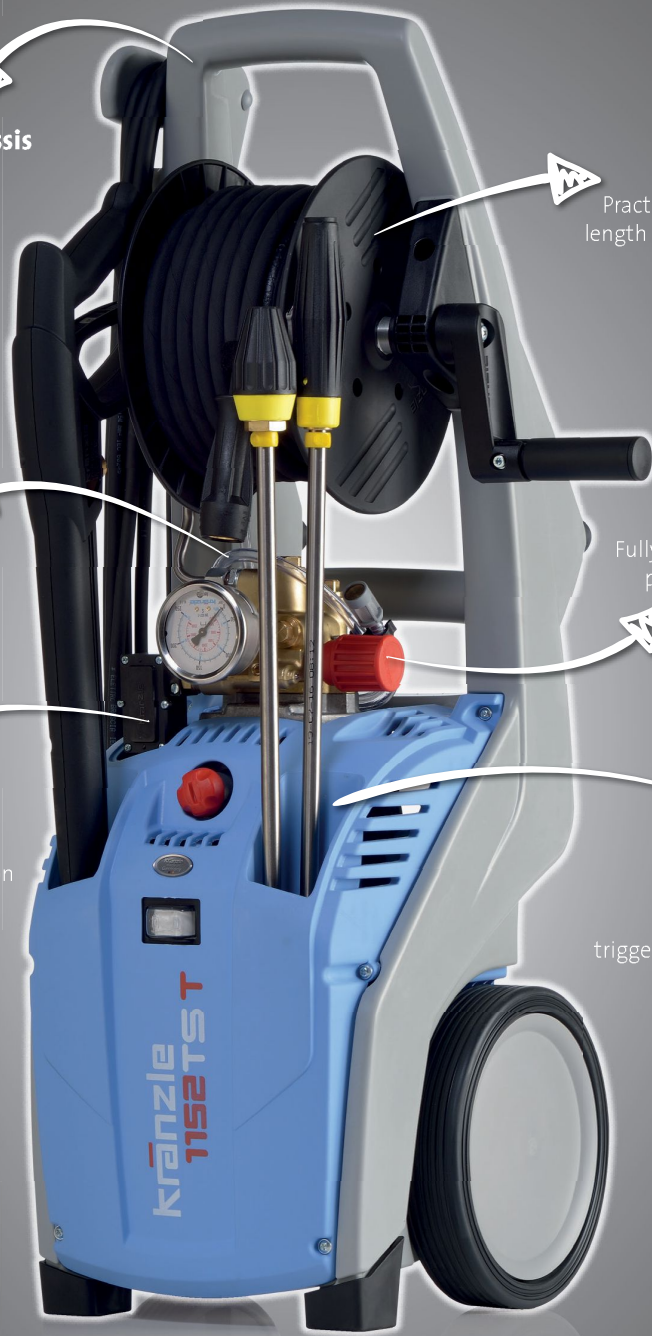

Figures: K 1152 TST

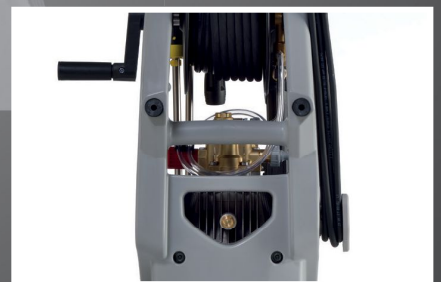



**TOP
SELLER**



		K 1152 TS		K 1152 TST	
		without hose drum		incl. hose drum	
Technical specifications					
Operating pressure adjustable	bar / MPa	30-130 / 3-13		30-130 / 3-13	
Max. admissible overpressure	bar / MPa	150 / 15		150 / 15	
Connected load	V / ~ / Hz / A	230 / 1 / 50 / 12		230 / 1 / 50 / 12	
Motor speed	Rpm	2800		2800	
Water output	l/min l/h	10	600	10	600
Power intake / Power output	kW kW	2.8	2.0	2.8	2.0
Power supply cable	m	5		5	
Dimensions L x W x H	mm	360 / 365 / 870		360 / 365 / 870	
Weight	kg	29		31.5	
Cleaning Agent Intake		●		●	
Equipment					
Hose drum		-		●	
Steel braided high-pressure hose	m	10		15	
Trigger gun with safety catch	Model	M2000		M2000	
Dirtkiller lance	Nozzle size	● 042		● 042	
Vario-Jet lance	Nozzle size	● 042		● 042	
		without Dirtkiller lance	incl. Dirtkiller lance	incl. Dirtkiller lance	
Ord.no.		41219	412191	412181	



For detailed technical information, see page 75