

COLD WATER – TWO-WHEEL

The K 2000-Series



One-piece Roto-Mold chassis
Virtually indestructible

Integrated Hose drum
Practical design and features a longer length high-pressure hose complete with folding crank (TST design)

Total-stop system
Auto-shutdown feature improves seal life-span and reduces power consumption

Cleaning Agent Intake
Injector system for dispensing of cleaning agents

Neat storage system
Practical stowing of the trigger gun with safety catch and lances


Pressure regulation
Fully adjustable control allows operating pressures to be set to suit any task

Figures: K 2160 TST



		K 2160 TS		K 2160 TST		K 2195 TS		K 2195 TST		K 2175 TS		K 2175 TST	
Technical specifications		without hose drum		incl. hose drum		without hose drum		incl. hose drum		without hose drum		incl. hose drum	
Operating pressure adjustable	bar / MPa	30-140 / 3-14		30-140 / 3-14		30-180 / 3-18		30-180 / 3-18		30-160 / 3-16		30-160 / 3-16	
Max. admissible overpressure	bar / MPa	160 / 16		160 / 16		195 / 19.5		195 / 19.5		175 / 17.5		175 / 17.5	
Connected load	V / ~ / Hz / A	230 / 1 / 50 / 14		230 / 1 / 50 / 14		230 / 1 / 50 / 14		230 / 1 / 50 / 14		400 / 3 / 50 / 6.7		400 / 3 / 50 / 6.7	
Motor speed	Rpm	1400		1400		1400		1400		1400		1400	
Water output	l/min l/h	11	660	11	660	8	480	8	480	12	720	12	720
Power intake / Power output	kW kW	3.2	2.4	3.2	2.4	3.2	2.4	3.2	2.4	3.3	2.6	3.3	2.6
Power supply cable	m	5		5		5		5		5		5	
Dimensions L x W x H	mm	375 / 360 / 900		375 / 360 / 900		375 / 360 / 900		375 / 360 / 900		375 / 360 / 900		375 / 360 / 900	
Weight	kg	37		39.5		37		39.5		37		39.5	
Cleaning Agent Intake		●		●		●		●		●		●	
Equipment													
Hose drum		-		●		-		●		-		●	
Steel braided high-pressure hose	m	10		15		10		15		10		15	
Trigger gun with safety catch	Model	M2000		M2000		M2000		M2000		M2000		M2000	
Dirtkiller lance	Nozzle size	● 042		● 042		○ 03		○ 03		● 042		● 042	
Vario-Jet lance	Nozzle size	● 042		● 042		○ 03		○ 03		● 042		● 042	
Ord.no.		417801		417811		417841		417851		417821		417831	

Fig. Non-marking version (NoM). Info on page 58

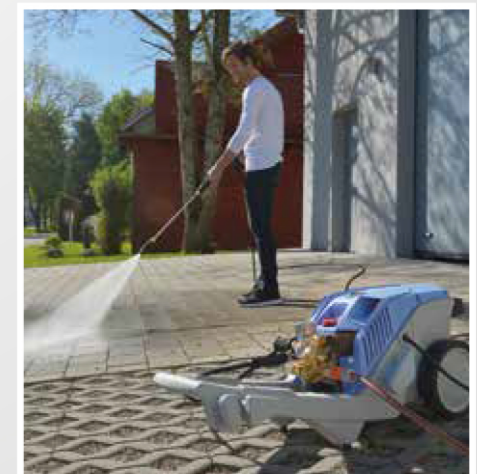

For detailed technical information, see page 75-76