

The Profi-Series

One-piece Roto-Mold chassis
Virtually indestructible

Integrated water tank
Prevents damage to the high-pressure pump caused by a lack of water

Integrated Hose drum
Practical design and features a longer length high-pressure hose complete with folding crank


Total-stop system
Auto-shutdown feature improves seal life-span and reduces power consumption

Cleaning Agent Intake
Injector system for dispensing of cleaning agents

Pressure regulation
Fully adjustable control allows operating pressures to be set to suit any task

Neat storage system
Practical stowing of the trigger gun with safety catch and lances

Figures: Profi 175 TST

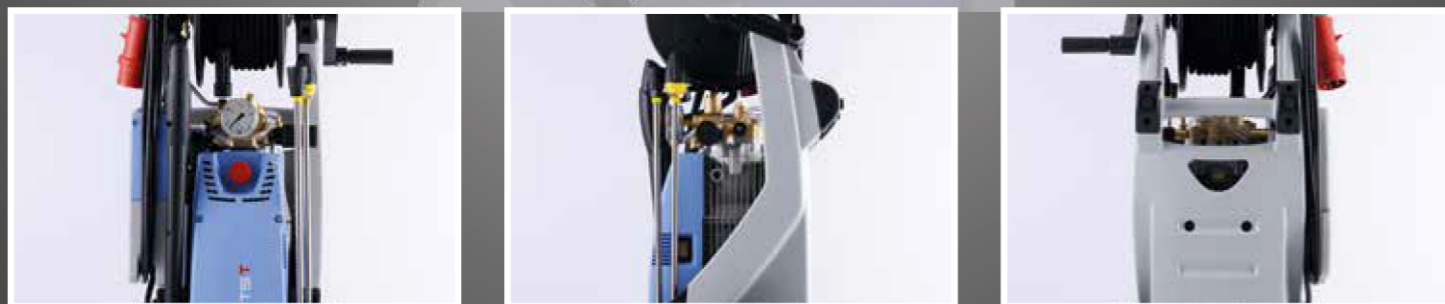

		Profi 160 TST	Profi 195 TST	Profi 175 TST
Technical specifications				
Operating pressure adjustable	bar / MPa	30-140 / 3-14	30-170 / 3-17	30-150 / 3-15
Max. admissible overpressure	bar / MPa	160 / 16	195 / 19.5	175 / 17.5
Connected load	V / ~ / Hz / A	230 / 1 / 50 / 14.3	230 / 1 / 50 / 14.3	400 / 3 / 50 / 7.2
Motor speed	Rpm	1400	1400	1400
Water output	l/min l/h	11 660	8 480	12 720
Power intake / Power output	kW kW	3.2 2.5	3.2 2.5	3.8 3.0
Power supply cable	m	5	5	5
Dimensions L x W x H	mm	355 / 375 / 980	355 / 375 / 980	355 / 375 / 980
Weight	kg	45	45	45
Cleaning Agent Intake		●	●	●
Equipment				
Hose drum		●	●	●
Steel braided high-pressure hose	m	15	15	15
Trigger gun with safety catch	Model	M2000	M2000	M2000
Dirtkiller lance	Nozzle size	● 042	○ 03	● 042
Stainless steel lance with flat jet nozzle	Nozzle size	● M20042	○ M2003	● M20042
Ord.no.		412301	412311	412321



TECHNICAL HIGHLIGHTS!

INTEGRATED WATER TANK

The integrated water tank mostly prevents pump damage from lack of water.

The water tank can be removed in a few steps when the device is required to suck water from a larger external water tank or reservoir.

For detailed technical information, see page 76-77